

Cable (all torsion-rated for wind turbine loops, −40 °C)	Ø approx.
Generator 4G6 + screen, 0.6/1 kV (doc 12)	20 mm
48 V auxiliary / backup supply 2 × 10 mm²	14 mm
Safety chain + control signals 12 × 1.0 mm², screened	12 mm
Industrial Ethernet (Cat 6A, torsion) + fibre option	12 mm
Earthing: separate Cu braid via the yaw lightning contact	–

HANGER IN THE YAW BORE · 1:5

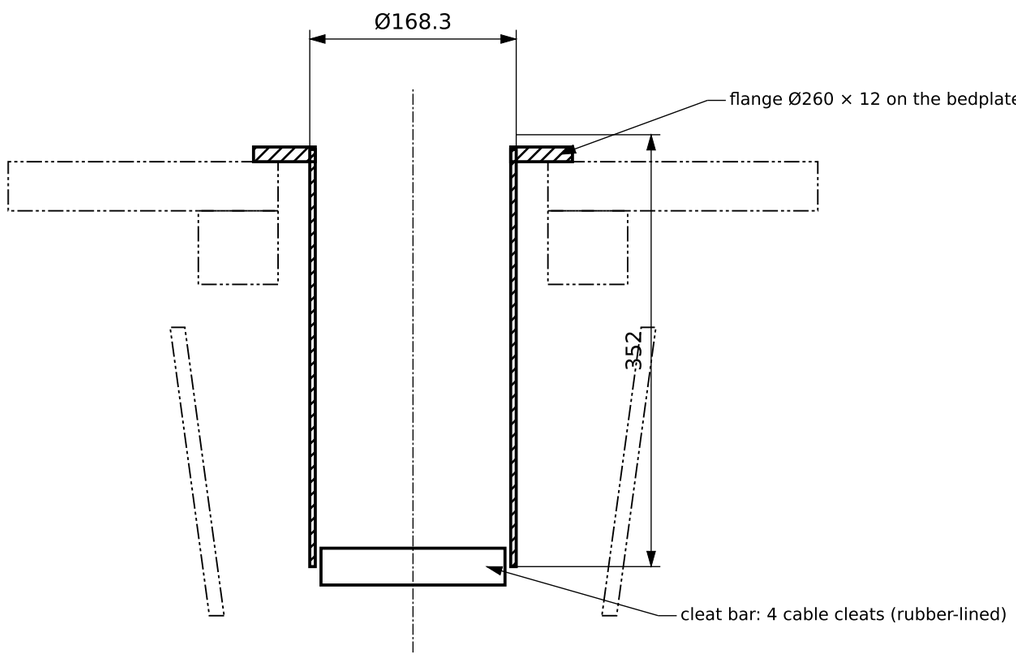

TWIST LOOP IN THE TOWER (not to scale)

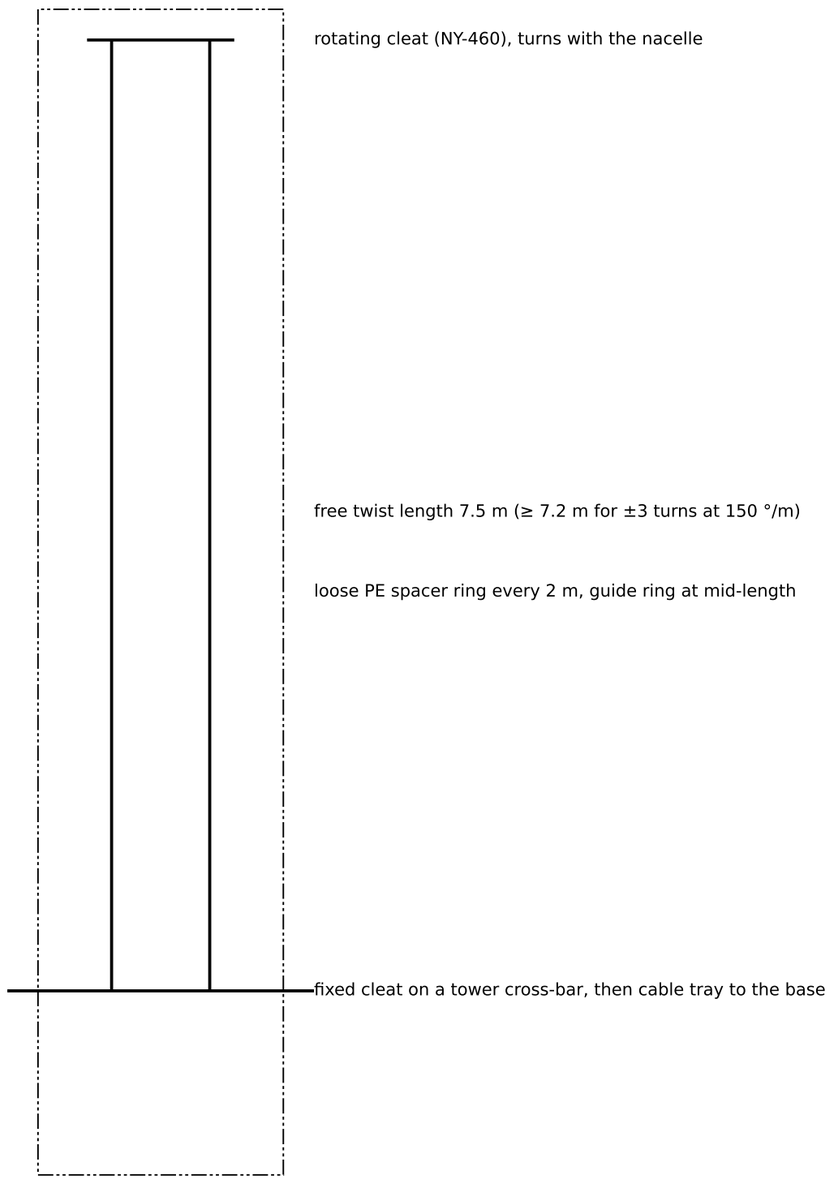

NOTES

1. Untwist by the controller at ±2.5 turns when the 10 min mean wind is below 5 m/s; safety chain opens at ±3 turns (NY-440 cam switch).
2. No slip ring for power (doc 07). Cables leave the bedplate inside the hanger tube, so they never touch the rotating ring or the adapter.
3. Inspection through the adapter window (NY-400) at every service: sheath wear, cleats, twist count against the encoder.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · YAW SYSTEM (DOC 25)

CABLE HANGER AND TWIST LOOP

DRAWING NO.	REV / DATE	SCALE (A3)
NY-460	A · 2026-11-05	1:5 / NTS
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
tube S355 Ø168.3 × 4.5, flange S355J2+N	10 kg (model)	Claude / not checked