SECTION (4:1)

R309.20 −0.05/0 outer (bonded face), R301.50 inner, arc 7.20°

magnetised radially; pole marked on the outer face

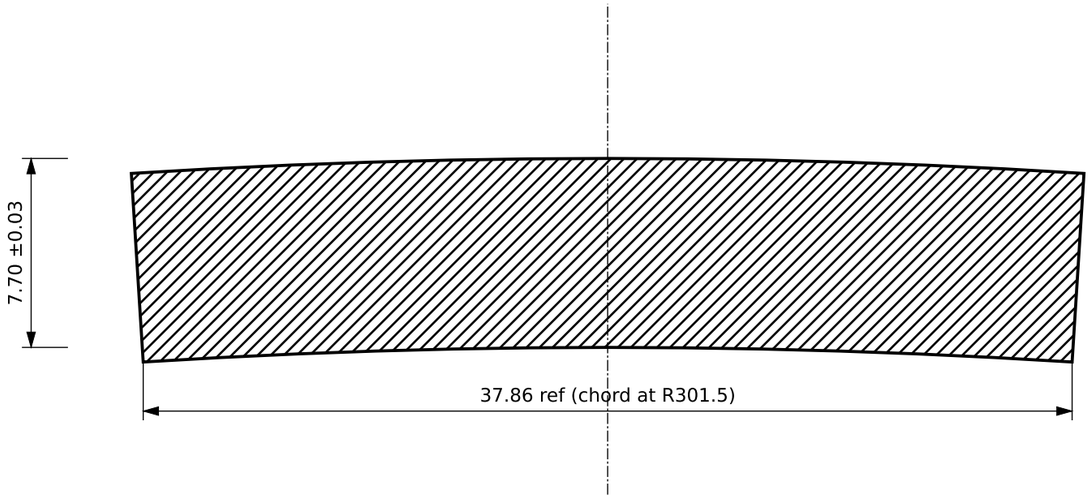

SIDE (2:1)



NOTES

1. Grade N40UH (Br ≥ 1.25 T, HcJ ≥ 1990 kA/m at 20 °C); supplier to give the demagnetisation curve at 20, 80, 120 and 150 °C (doc 05: HcJ ≥ 896 kA/m at 120 °C required).
2. Length 18.35 ±0.05 (4 pieces per pole, axial segmentation for eddy loss; 0.2 mm bond gaps). 160 pieces + 8 spares, half N-in, half S-in, marked on the outer face.
3. Coating NiCuNi 10 to 20 µm + epoxy 15 to 25 µm; salt spray ≥ 240 h (ISO 9227) on witness samples; corners R0.3.
4. Flux check: each piece within ±1.5 % of the batch mean (Helmholtz coil); reject outliers. Record the serial batch for traceability.
5. Bonding into the drum: structural epoxy rated 150 °C, positioned by a GRP comb (pole pitch 9.000°, 40 poles), then 0.5 mm glass/epoxy wet layup over the inner face (vacuum bag) as retention and corrosion barrier.
6. Handling: magnets must never approach a steel surface uncontrolled; magnet insertion jig with brass slider and screw feed (doc 14, 7.2).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE (ICELAND) · NACELLE PROTOTYPE P1

MAGNET SEGMENT (PURCHASE DRAWING)

DRAWING NO.	REV / DATE	SCALE (A3)
NP1-220	B · 2026-11-03	4:1 / 2:1
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
NdFeB N40UH, NiCuNi + epoxy coating	41 g each	Claude / not checked