


AXONOMETRIC VIEW (not to scale)

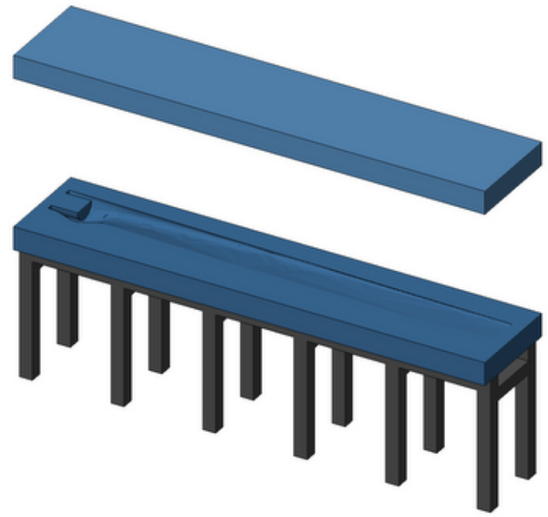

PLAN, LOWER HALF (pressure side), frame RHS 80 × 80 × 4 hidden

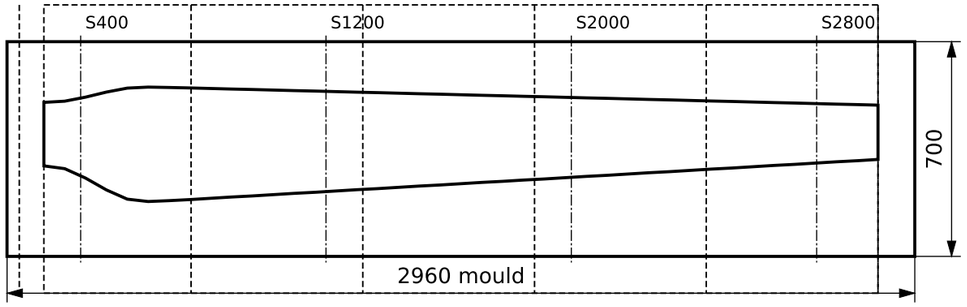

SECTION S1200: lower half solid, upper half phantom; parting line on LE/TE

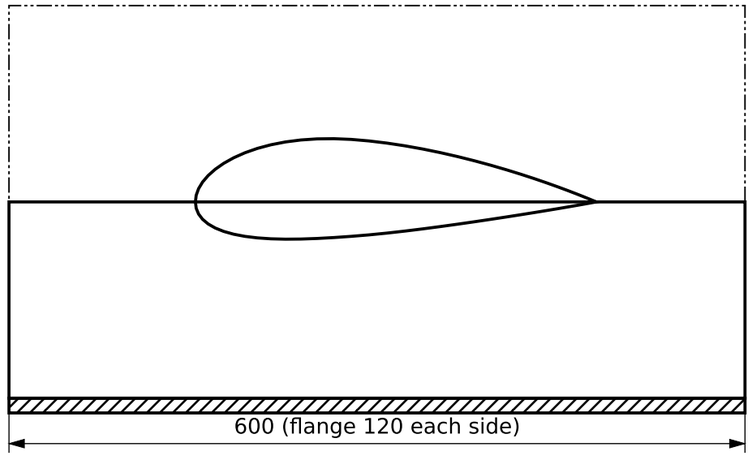

Step	Process
1 Plug	CNC-machined tooling board (polyurethane 0.7 g/cm³) on an MDF/steel core; ruled parting surface along LE and TE; sand P600, seal, release
2 Halves	Tooling gelcoat 1 mm, skin 2 × 300 g CSM, 10 mm vinylester/glass build-up, egg-crate ribs 12 mm GRP every 400 mm
3 Frame	RHS 80 × 80 × 4 cradle, 6 legs, levelling feet, pins Ø20 at 4 places on the flanges for closing
4 Heating	silicone heating mats 300 W/m² under the lower half, 70 °C post-cure; thermocouples ×4
5 Web	flat-plate web mould: tapered aluminium plate 2 900 × 220 on the bench (NS6-115)

NOTES

1. One mould set makes all blades (≥ 300 parts before refurbishment). Mould flange 120 mm with a 25 mm vacuum sealing land and a 6 mm resin trap groove.
2. Tolerances: profile ± 0.5 mm, twist ± 0.2°, length ± 2 mm. Check each new mould against the plug with the five section templates S400 … S2800.
3. Root end: 20 mm steel end plate with the bolt pattern of the root fixture NS6-115 (4 × M12), square to the pitch axis.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

BLADE MOULD SET (PLUG, TWO HALVES, FRAME)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-110	B · 2026-11-06	1:20
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
GRP tooling laminate on S235 RHS frame	≈ 2 × 75 kg + frame 155 kg	Claude / not checked