


SIDE VIEW (tower lug between the two bracket plates)

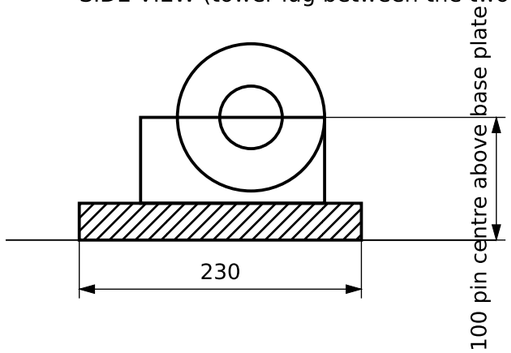

PLAN (4 × M24 anchors, NS6-510)

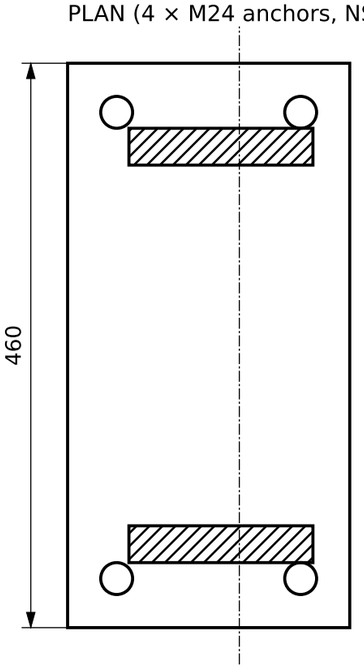

AXONOMETRIC VIEW (not to scale)

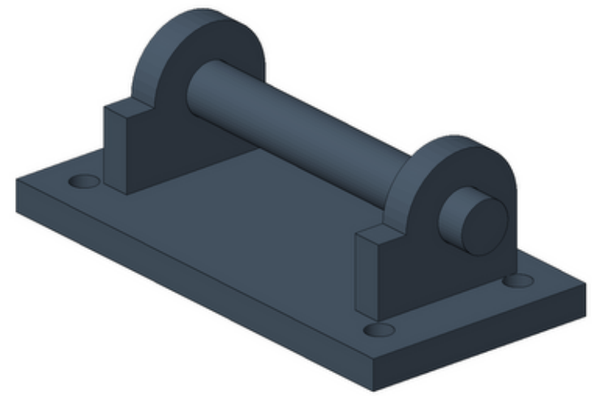

NOTES

1. Hinge axis 390 mm upwind of the tower axis (−X side), 40 mm above the base-flange underside: the tower lands on the levelling nuts as it reaches vertical.
2. Pin Ø50 h9 in Ø51 holes, secured with R-clips; pin load at tilt-up 2 × 55 kN shear (double shear, use 0.15).
3. Base plate 30 sits on the pedestal under the grout line; anchors 4 × M24 8.8, 350 Nm after the grout has cured.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

BASE HINGE BRACKETS AND PIN

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-410	B · 2026-11-06	1:5
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N 30 mm plate, galv.; pin 42CrMo4+QT Ø50 h9	37 kg	Claude / not checked