


PLAN: template ring (top) on the anchor cage; 4 hinge anchors at −X

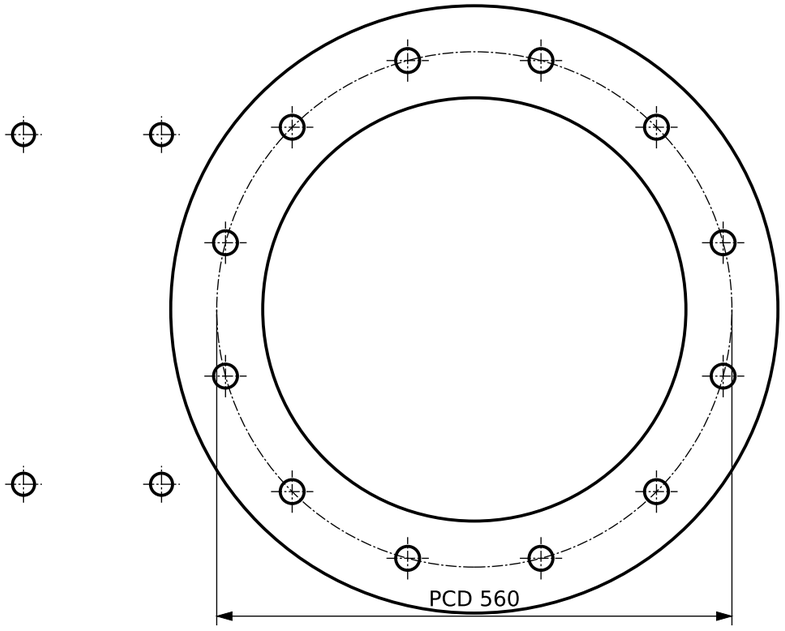

ELEVATION (ground at 0)

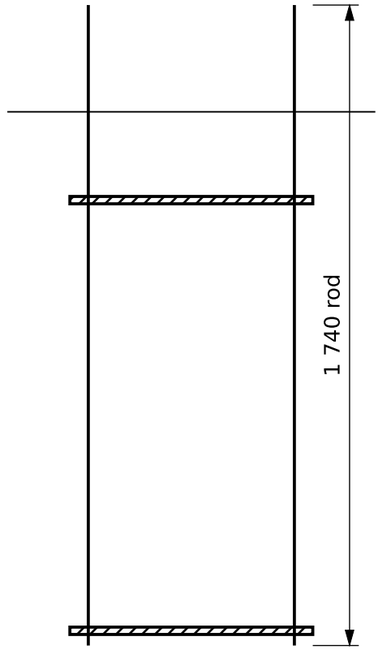

AXONOMETRIC VIEW (not to scale)

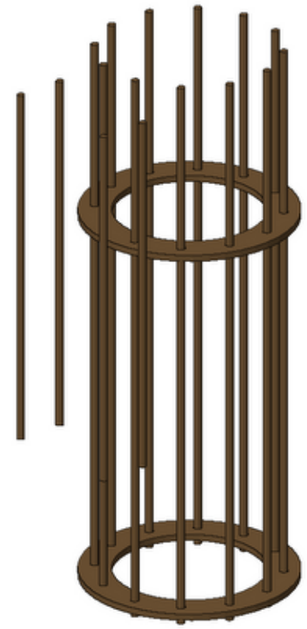

NOTES

1. Anchor rods M24 8.8 HDG × 1 740, rolled thread both ends, 2 nuts + plate washer at the bottom ring; top 260 above the pedestal: levelling nut, base flange 35, washer, nut, lock nut.
2. Set the cage with the template ring (= base flange drilling) bolted on top; position ± 3 mm, level ± 1 mm; the hinge anchors from a second template bolted to the same ring.
3. Pretension after the grout (≥ 40 MPa) has cured 7 days: 450 Nm (≈ 110 kN) with a calibrated wrench, re-check after 1 month.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

ANCHOR CAGE AND TEMPLATE

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-510	B · 2026-11-06	1:10
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
M24 8.8 HDG threaded rod; S355 rings 100 × 20	144 kg	Claude / not checked