


SIDE VIEW (Z = 0 section), phantom: disc and yaw bearing

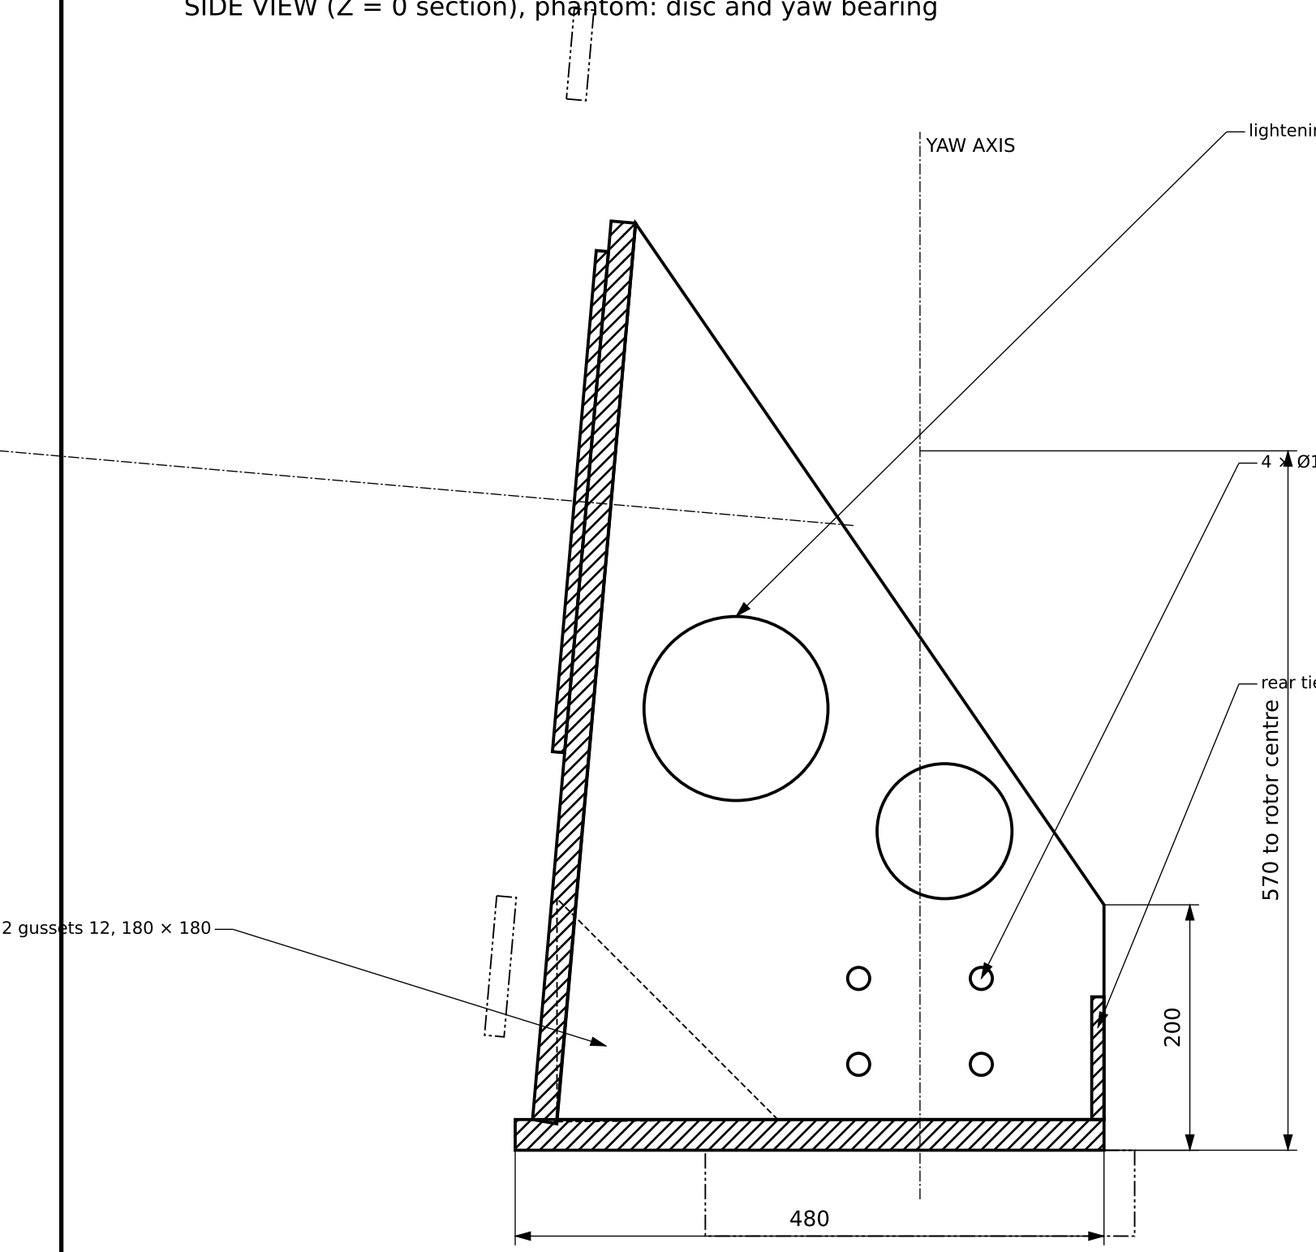

FRONT PLATE 20, view along the spindle axis

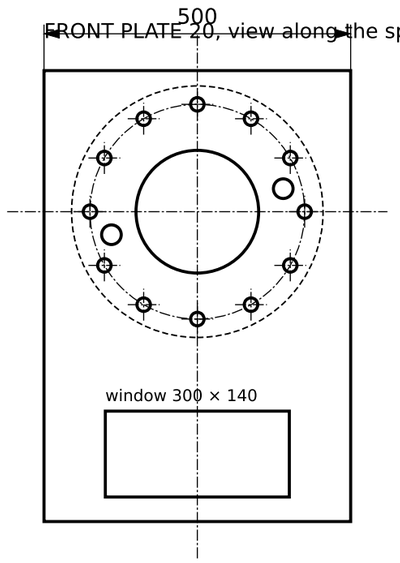

BOTTOM PLATE (yaw flange), from below

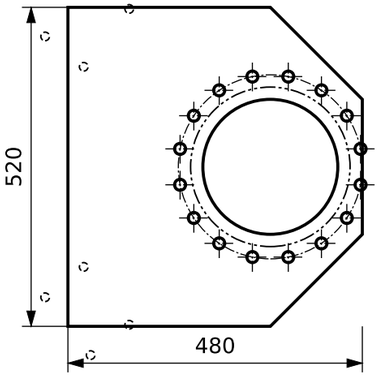

NOTES

1. Replaces NP1-300 (12 kW, 333 kg as drawn) on S6 (doc 32). Same interfaces: Ø410 × 10 pad at x 470, Ø200 H7 spigot, 12 × Ø22 PCD 350 (M20 10.9 from inside, 540 Nm), 2 × Ø32 cable holes PCD 290; bottom Ø220 bore, 16 × Ø18 PCD 300 (yaw inner ring, M16 10.9 with nuts).
2. Plates: front 20, bottom 25, sides 10 (outer faces Y ±260 for NP1-420), rear tie 10, gussets 12. Rear corners of the bottom plate chamfered 150 × 150.
3. Pad units NY-410 bolt under the front corners (4 × M12 each, tapped, hidden); hanger tube flange NY-460 on Ø260 at the bore; caliper bracket NP1-310 on the left side plate front edge; lock pin holder NP1-321 on 2 × M12 in the front plate top edge.
4. Design checks (SLM γ 3, doc 32): root section 21 MPa, front plate 51 MPa, bottom plate 144 MPa (allow 323); fatigue 0.07. Thicknesses are set by machining and slewing ring flatness, not strength: FE stiffness check of the ring seat before release.
5. Welds ISO 5817 B, 100 % MT; stress relieve; machine front and bottom plates in one set-up on a 5° fixture: front face square to the yaw flange within 0.05/400 at 5.00° ± 0.05°; ring seat flatness 0.05.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

BEDPLATE WELDMENT 6 kW (LIGHT)

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-300	A · 2026-11-06	1:5
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N plates, stress relieved, machined	127 kg	Claude / not checked