

ELEVATION

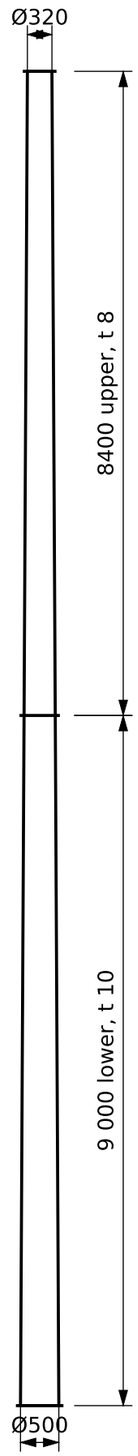


adapter NY-400 on top; rotor centre 18 000


FLANGES (plan)



BASE FLANGE 40, 24 × M24 PCD 600



FLANGE 30 at 9 m, 12 × M24 PCD 480



TOP FLANGE 30, 16 × M20 PCD 380

NOTES

1. Doc 09 design (tilt-up on a base hinge, removable gin pole 0.33 H, no crane) at the doc 30 S6 size; door-free base: cables leave through the base hinge frame into the cabinet.
2. Longitudinal seam welds full penetration, staggered 90° between cans; flange welds full penetration, ISO 5817 B, 100 % UT; flanges machined flat after welding (0.2 mm).
3. Climbing: none (service by lowering the tower). Lightning: tower is the down conductor, 2 earthing lugs at the base.
4. Tower 1P exclusion zone 47.5–57.4 rpm in the controller (doc 31).

Item	Value
Shell	Ø500 × 10 → Ø320 × 8, linear taper, D/t ≤ 51
Sections	2: 9.0 m + 8.4 m, flanged
First frequency	0.87 Hz (soft footing, ice 0.81 Hz)
Governing	parked V_e50, use 0.97
Fatigue	0.06 base, 0.02 at 9 m (doc 31 spectra)
Tilt-up	base moment 405 kNm, 6 m gin pole, winch 68 kN
Base flange	24 × M24 10.9, F_bolt 222.9 kN / 254.2 kN

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

6 kW WIND TURBINE S6 (ICELAND) · FIXED PITCH, STALL CONTROL

TOWER 18 m · TILT-UP MONOPOLE

DRAWING NO.	REV / DATE	SCALE (A3)
NS6-400	A · 2026-11-06	1:50 / 1:10
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
S355J2+N, rolled and seam welded; hot-dip galvanized	1824 kg	Claude / not checked