

Tower (tower8_m8, stiff_final_sim8)	Value
Mass	671 kg
f1 rigid / soft soil + ice	2.78 / 2.65 Hz
f2	22.28 Hz
3P exclusion zone	48–61 rpm
Utilisation (governing)	0.768 (earthquake 0.5 g (ground D) + operation)
Fatigue damage base / mid	0.53 / 0.07
Base flange	16 × M24 10.9 on Ø500, F_bolt 202.5 kN (F_t,Rd 254.2)
Top flange	Ø420 × 30, 16 × M20 PCD 380 to NY-400
Tilt-up base moment	150.0 kNm, line pull 66.2 kN
D/t max	50.0


ELEVATION

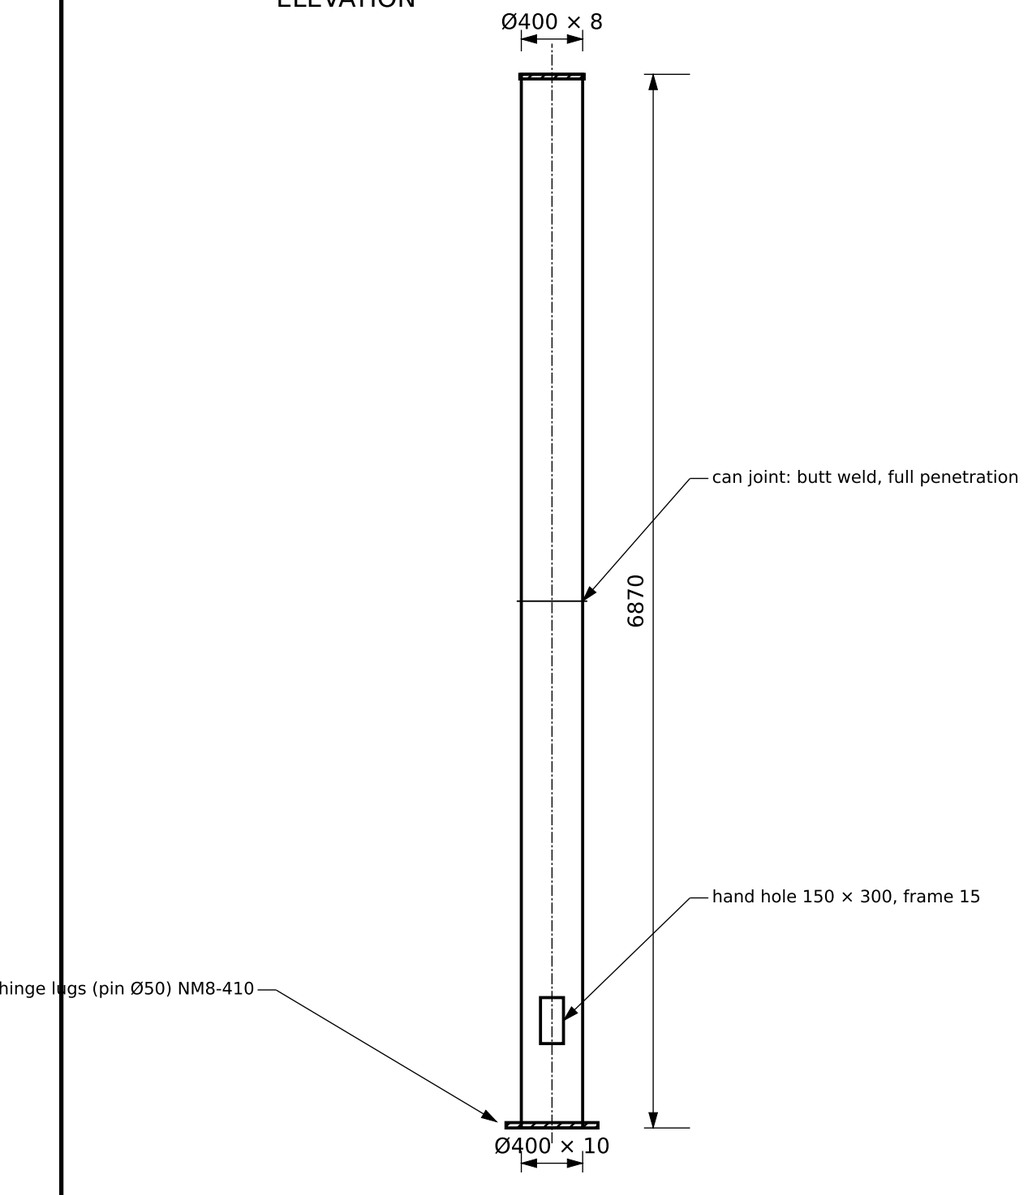

AXONOMETRIC VIEW (not to scale)

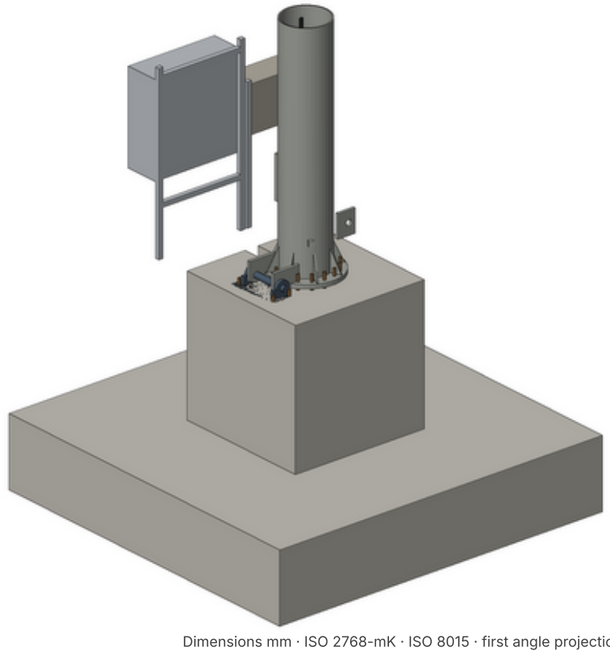

AXONOMETRIC VIEW (not to scale)

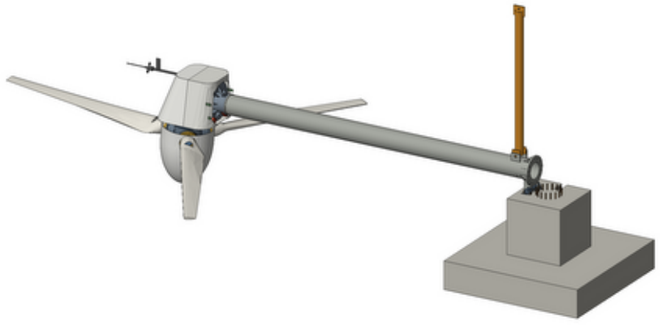

NOTES

1. Stiff tower: f1 above 1.15 × 1P at 131 rpm (2.51 Hz) and below 3P/1.1 at rated (5.95 Hz). The

nferential welds full

).

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

TOWER 8 m · ONE-PIECE TILT-UP MONOPOLE

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-400	A · 2026-11-06	1:40
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
S355J2+N, rolled and seam welded; hot-dip galvanized	671 kg (sizing), 700 kg CAD	Claude / not checked