


AXONOMETRIC VIEW (not to scale)

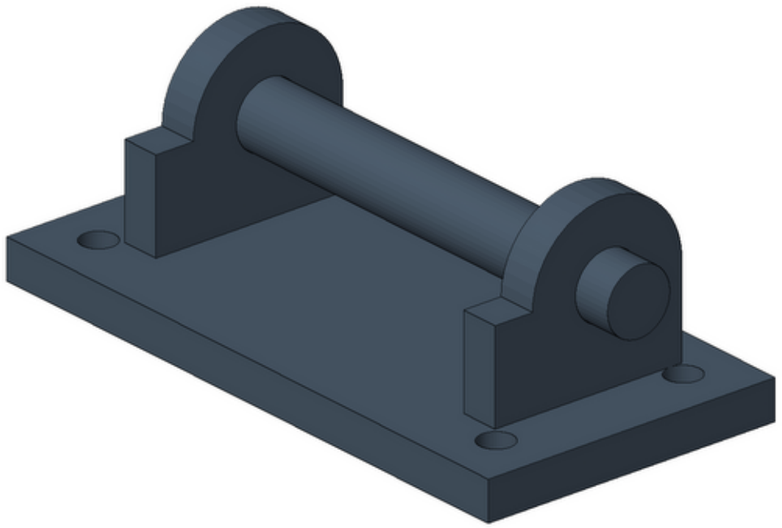

AXONOMETRIC VIEW (not to scale)

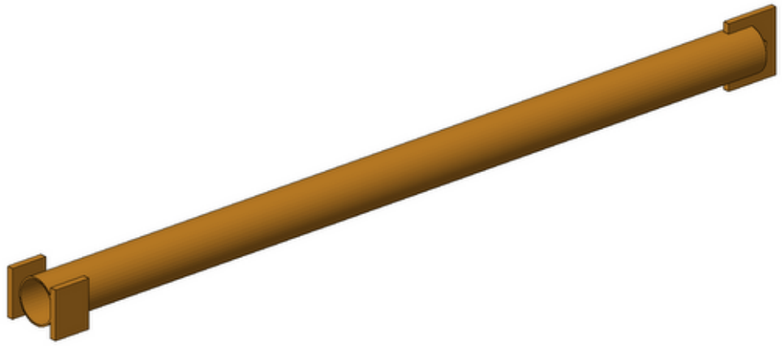

AXONOMETRIC VIEW (not to scale)

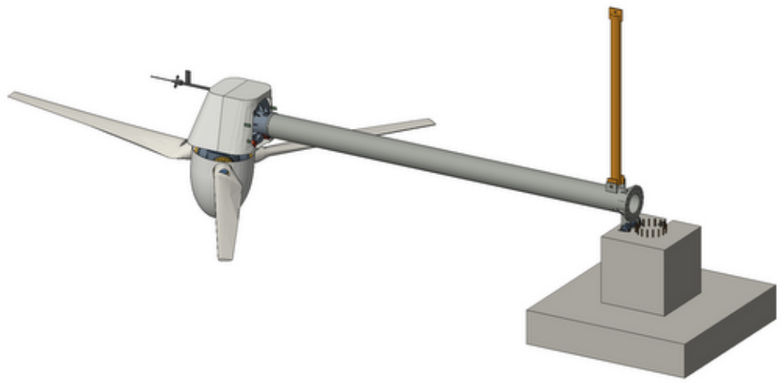

Erection (tower8_m8)	Value
Tilt-up base moment	150.0 kNm
Winch line pull (gin pole 0.33 H)	66.2 kN
Tower utilisation in tilt-up	0.37
Hinge pin	Ø50 h9, 42CrMo4+QT, double shear
Gin pole	Ø168.3 × 6.3, 3.0 m (S6 tool NS6-420)

NOTES

1. The S6 hinge and gin pole (doc 34) carry the M8 head: line pull rises with the 1.39 t head; use a 10 t winch with a 2-part line (≈ 32 kN on the drum) or a 5 t winch with a 4-part line.
2. Hinge brackets on 4 × M24 anchors in the pedestal; pin greased, secured by R-clips; tower lies on a trestle at 2.5 m during head mounting.
3. No one inside the fall zone (1.5 × tower height) while lifting; wind below 8 m/s; tag lines on two blade tips.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

BASE HINGE, GIN POLE INTERFACE AND ERECTION

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-410	A · 2026-11-06	–
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
S355J2+N 30 mm plate, galv.; pin 42CrMo4+QT Ø50 h9	37 kg	Claude / not checked