

Ground class	B m	depth m	concrete m³	bearing kPa (q_Rd)
firm soil (dense gravel, moraine)	3.0	1.6	6.2	234.0 (300.0)
soft volcanic soil (loose ash, pumice sand)	3.4	1.6	7.8	97.3 (100.0)
frost-susceptible silt (thawed)	3.2	1.6	7.0	126.3 (150.0)
rock (anchored plinth)	1.6 × 1.6 × 0.8	–	2.0	8 anchors Ø20


SECTION (firm ground)

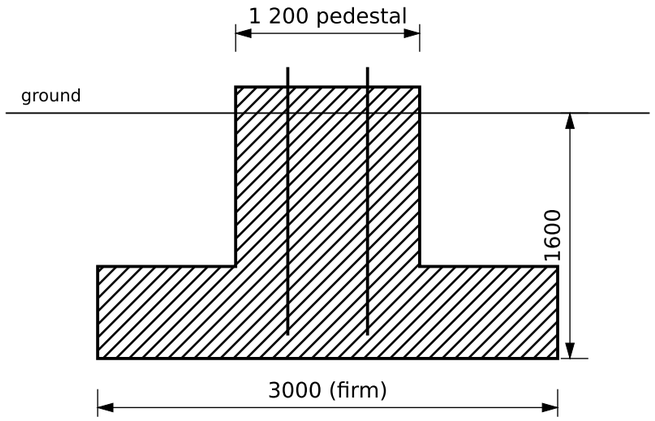

AXONOMETRIC VIEW (not to scale)

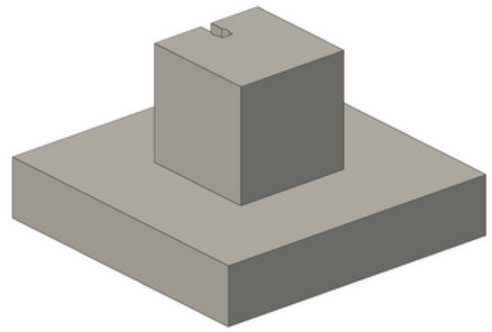

AXONOMETRIC VIEW (not to scale)

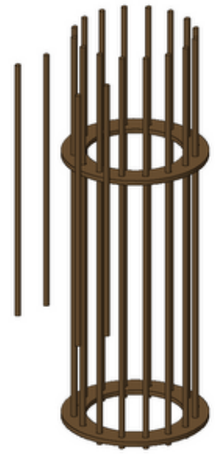

NOTES

1. Anchor cage NM8-510: 16 × M24 8.8 HDG on PCD 500, two template rings, embedded 1.45 m; 4 hinge anchors M24.
2. Pedestal top 170 above ground; 30 mm grout under the base flange. Concrete C30/37 XF4 air-entrained, cover 50, rebar ≈ 75 kg/m³.
3. Ground class from a trial pit at the site (depth 2 m); frost-susceptible silt: replace 0.5 m under the slab with compacted gravel. Rock: drilled plinth with 8 anchors.

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

FOUNDATION · SPREAD FOOTING (8 m TOWER, M8)

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-500	A · 2026-11-06	1:40
MATERIAL	MASS (CALC.)	DRAWN / CHECKED
C30/37 XF4 air-entrained; B500C rebar	6.2–7.8 m³	Claude / not checked