

Yaw (hub_yaw_m8)	Value
Ring	Dpw 410, gear z165 m4, face 60
s0 (SLM H + shaft moment)	1.41 (Dpw 360: 0.95)
Tilt moment design	52.4 kNm
Gearbox static need	2308 Nm
Gear static S_F pinion / ring	3.39 / 2.69
Gear static S_H pinion / ring	1.54 / 1.18
Inner ring bolts	16 × M16 10.9 PCD 350 (bedplate)
Outer ring bolts	16 × M16 10.9 PCD 490 (adapter NY-400)


PLAN (X downwind to the right), bedplate removed

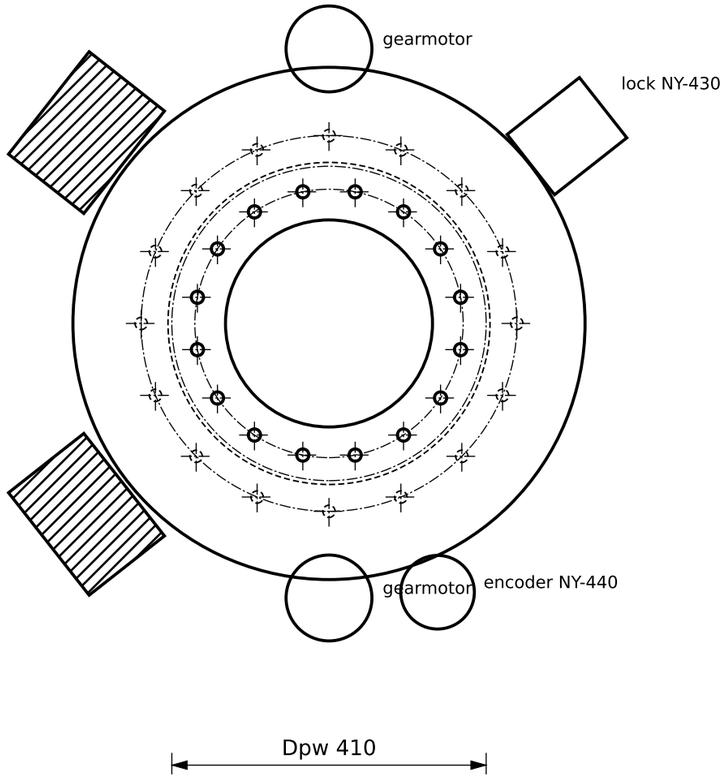

AXONOMETRIC VIEW (not to scale)

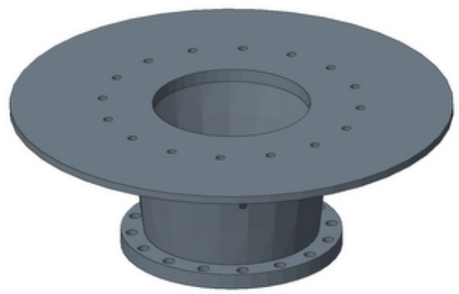

AXONOMETRIC VIEW (not to scale)

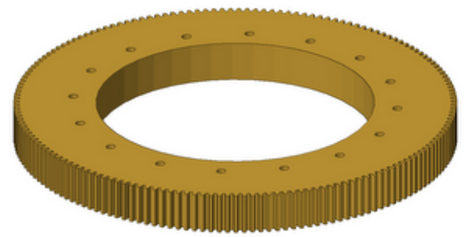

Dimensions mm · ISO 2768-mK · ISO 8015 · first angle projection · edges broken 0.5 unless stated · NOT CHECKED: prototype release only after review

NOTES

1. Doc 25 yaw system with the ring one size up (Dpw 360 fails s0 0.95 under the M8 SLM). Every radial NY dimension moves out 25 mm: adapter seat r 150–275, friction track r 275–420, pad units, lock and encoder.
2. Gearmotor centre r 358 (pinion z14 m4 on z165); NP1-420 brackets moved out 30 mm. Gearbox output ≥ 2.3 kNm static, motor brake on the input.
3. Ring bolt circles are preliminary: the supplier drawing of the chosen ring replaces this sheet's PCDs and hole sizes; bolt checks in hub_yaw_m8 used the Dpw 360 PCDs and are conservative.

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

YAW SYSTEM LAYOUT · SLEWING RING Dpw 410

DRAWING NO.	REV / DATE	SCALE (A3)
NM8-911	A · 2026-11-06	1:8
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
ring bought; NY parts per doc 25	ring ≈ 66 kg	Claude / not checked