

Plate	t mm	kg
Front plate	20	44.8
Bottom plate (yaw flange)	30	43.6
Side plates (2)	10	28.3
Check	util	
Root section	0.12	
Front plate	0.31	
Bottom plate	0.68	
Yaw bolts	0.42	
Fatigue root	0.14	


SIDE VIEW (front to the left)

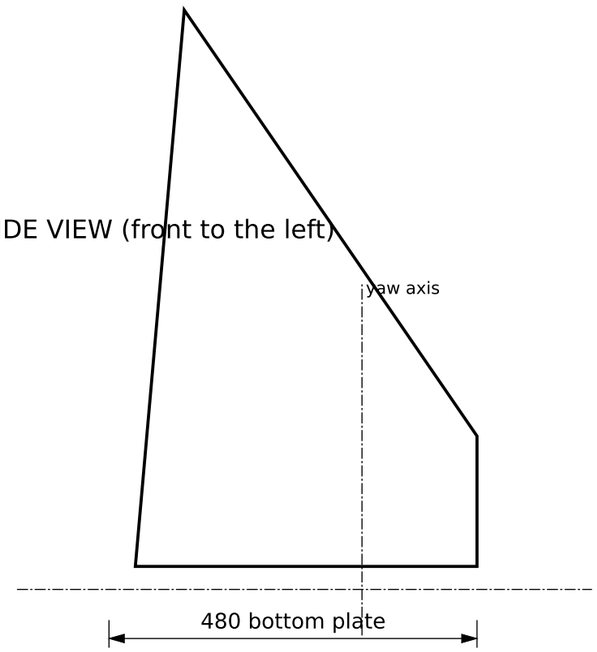

AXONOMETRIC VIEW (not to scale)

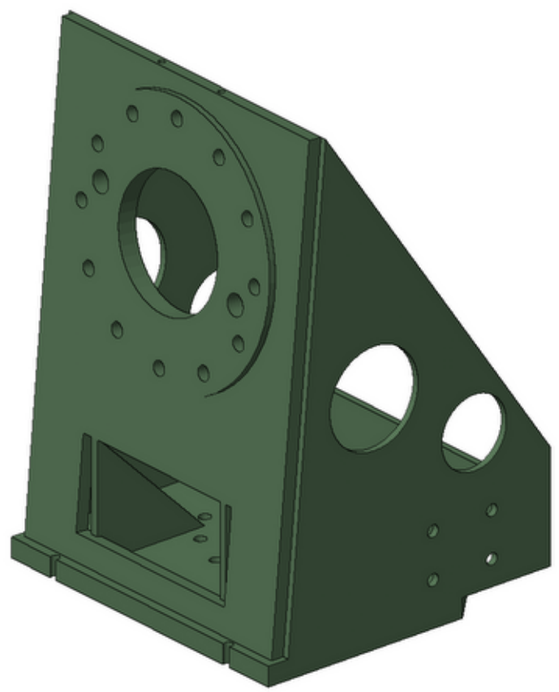

PLAN OF THE BOTTOM PLATE

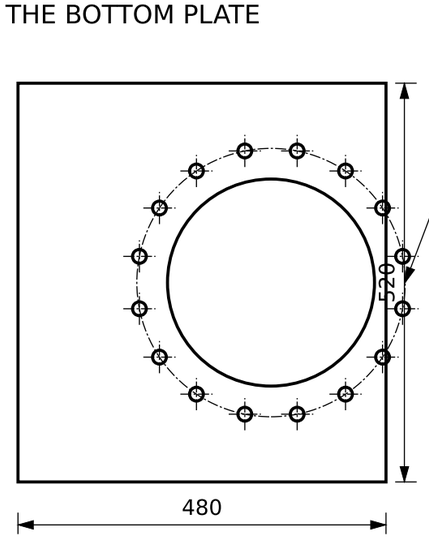

NOTES

1. NS6-300 geometry (doc 32) with the M8 plate thicknesses from bedplate_m8.py (decision D1): front 20, bottom 30, sides 10. Interfaces as NP1-300: spindle flange 12 × M20 PCD 350 + Ø200 spigot, pad unit and gearmotor brackets.
2. Changed for the Dpw 410 yaw ring: 16 × Ø18 on PCD 350 (was 300), central bore Ø270, pad unit bracket holes 25 mm further out. Third caliper bracket NM8-311 bolts through the front plate (4 × Ø17).
3. Stress relieve before machining; spigot bore and the yaw face machined in one set-up (parallel 0.05, square 0.05).

Dimensions mm · ISO 2768-mK · ISO 8015 · first ar

only after review

12 kW WIND TURBINE M8 (ICELAND) · Ø8.0 m, COLLECTIVE PITCH · 8 m TOWER

BEDPLATE WELDMENT 12 kW NP8 (LIGHT)

DRAWING NO.	REV / DATE	SCALE (A3)
NP8-300	A · 2026-11-06	1:8
MATERIAL	**MASS (CALC.)**	**DRAWN / CHECKED**
S355J2+N plates, stress relieved, machined	136 kg (plate model), 124 kg CAD	Claude / not checked